

# DISPLAYPORT - HDMI ADAPTER

## F5000-A007

Motherboard Accessories

---



Active converter, enables the connection of a HDMI monitor to a motherboard via a free DisplayPort interface



- ▶ Supports resolutions up to 4K (Ultra HD @ 60 Hz)
- ▶ Backward compatible to Full-HD
- ▶ Supports HDMI audio transmission

POSSIBILITIES START HERE

## ▶ TECHNICAL INFORMATION

<b>INTERFACE</b>	Input: DisplayPort (20 pin male plug with lock) Output: HDMI (19 pin female jack) Gold-plated contacts DisplayPort to HDMI converter chip: PS176
<b>APPROVED RESOLUTIONS</b>	Max. 4K @ 60 Hz (3840 x 2160 pixels) Further resolutions are supported, dependent on graphics driver and attached HDMI monitor
<b>DRIVER SUPPORT</b>	No additional / specific drivers required
<b>HOUSING</b>	ABS material, colour "black"
<b>NOTE</b>	Adapter hotplug support (BIOS Setup, OS) depends on attached HDMI device (monitor, TV set)
<b>APPROVALS</b>	CE, UKCA
<b>SUPPORTED MOTHERBOARDS</b>	All Kontron motherboards providing a free DisplayPort interface, like D3714-V/R, D3713-V/R, D36xx series, D3543-S, D3544-S, D34xx series

## ▶ ADAPTER DIMENSIONS

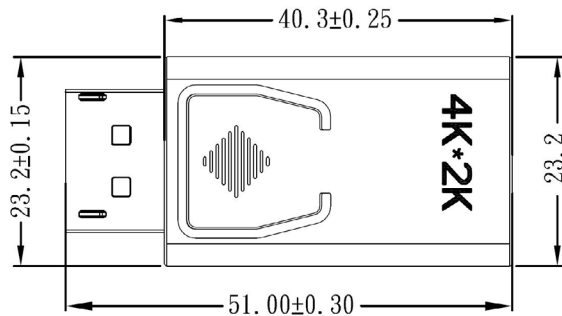

## ▶ ORDERING INFORMATION

ARTICLE	PART NO.	DESCRIPTION
DPP-HDMI ADAPTER	F5000-A007	Supports up to 4K/60Hz, incl. HDMI Audio Kit contains 20 pieces HDMI cable not included

## ▶ GLOBAL HEADQUARTERS

### Kontron Europe GmbH

Gutenbergstraße 2  
85737 Ismaning, Germany  
Tel.: +49 821 4086-0  
Fax: +49 821 4086-111  
info@kontron.com

[www.kontron.com](http://www.kontron.com)