


EM-ENT-I

Fanless Industrial PC



Specification


Chassis	Dimensions (W x L x H): 192 x 203 x 68mm
	Color: silver / black / on request (min. 20 pcs)
	Material: galvanized pre-coated metal sheet
	Weight netto: TBD
	MB: 170 x 170mm, mini-ITX form factor (Fujitsu D3543-S)
Front panel	1x 2.5" SATA HDD option, Integrated I/O shield
	Power button with LED backlight
Rear panel	Optional: 2x USB 2.0, 2x USB 3.1, 2x COM
	2x USB 2.0, 2x USB 3.1, 2x GLAN, 2x DisplayPort, 2x COM 2x PS/2, 2x Audio (Line in/out), DC input
Mounting options	Wall mount (pair included)
	VESA holder
	other customization: (min. 20 pcs)



All product specifications are subject to change without notice.

Mainboard

D3543-S mini-ITX

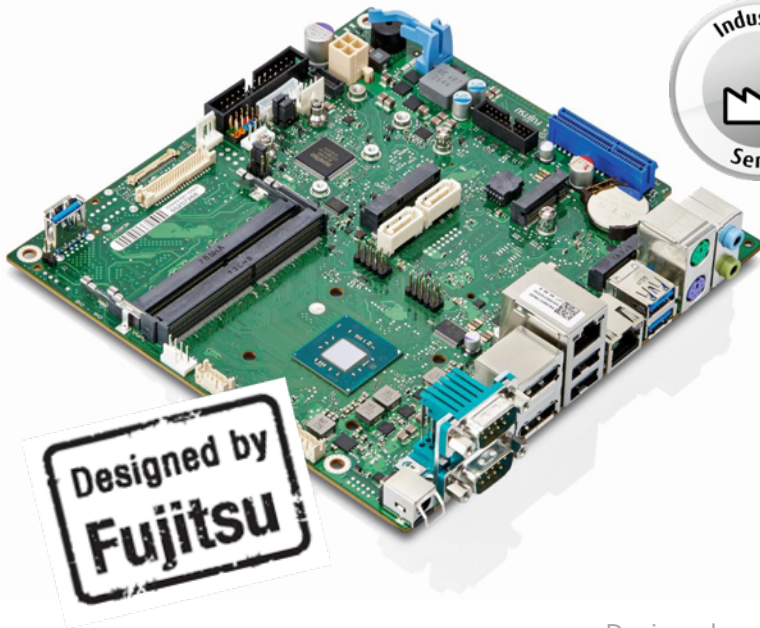

Designed and approved for 24/7 continuous operation @ 0-60°C

Supported Memory	2x DDR4 2400 SDRAM (SO-DIMM), up to 24GB
CPU options	Intel® Celeron® Processor J4005 (DC @2.7GHz) integrated Intel® UHD Graphics 600 (12EUs @700MHz)
	Intel® Celeron® Processor J4105 (QC @2.5GHz) integrated Intel® UHD Graphics 600 (12EUs @750MHz)
	Intel® Pentium® Silver Processor J5005 (QC @2.8GHz) integrated Intel® UHD Graphics 605 (18EUs @800MHz)
I/O Interface	2x DisplayPort V1.2
	Audio: Line in / Line out, Realtek ALC671 HDAC
	6x USB 2.0 (4x opt.), 4x USB 3.1 Gen1 (2x opt.) 4x COM RS232 (2x option, RS422/485 support), 2x PS/2
	2x SATA III - 6Gbs
	M.2 SSD 2280 (supports 2280/2260/2242, Key-B, SATA/PCIe)
	M.2 2230 module (WiFi / Bluetooth option)
	2x GbE LAN onboard (Intel i210 / Realtek RTL8111G)
External DC Input (8-36V, max. 5A)	
Product features	System Guard, Wake-on-LAN (WoL)
	HW Watchdog / Intel® TPM V2.0 onboard



All product specifications are subject to change without notice.